



| d ₁ | DIN7993 B/RB | ○ | | | | | ⊕ | | | d ₁ | DIN7993 B/RB | ○ | | | | | ⊕ | | |
|----------------|-----------------|----------------|----------------|------|-------|--|----------------|-------|-------|----------------|-----------------|----------------|----------------|-------|-----|--|----------------|-------|-----|
| | | d ₇ | d ₃ | Δ | e |  (kg/1000) | d ₂ | Δ | r | | | d ₇ | d ₃ | Δ | e |  (kg/1000) | d ₂ | Δ | r |
| 7 | RB7 | 0.8 | 7.9 | +0.3 | 4 | 0.071 | 7.8 | ±0.05 | 0.5 | 45 | RB45 | 2.5 | 48.8 | +0.8 | 16 | 4.89 | 47.5 | ±0.10 | 1.4 |
| 8 | RB8 | 0.8 | 8.9 | | 4 | 0.083 | 8.8 | | 0.5 | 48 | RB48 | 2.5 | 51.0 | | 16 | 5.24 | 50.5 | | 1.4 |
| 10 | RB10 | 0.8 | 10.9 | +0.4 | 4 | 0.108 | 10.8 | ±0.10 | 0.5 | 50 | RB50 | 2.5 | 53.0 | +1.0 | 16 | 5.51 | 52.5 | ±0.15 | 1.4 |
| 12 | RB12 | 1.0 | 13.2 | | 6 | 0.196 | 13.0 | | 0.6 | 55 | RB55 | 3.2 | 58.9 | | 20 | 9.77 | 58.2 | | 1.8 |
| 14 | RB14 | 1.0 | 15.2 | 6 | 0.234 | 15.0 | 0.6 | 60 | RB60 | 3.2 | 63.9 | 20 | 10.76 | 63.2 | 1.8 | | | | |
| 16 | RB16 | 1.6 | 17.8 | +0.5 | 8 | 0.706 | 17.6 | ±0.10 | 0.9 | 65 | RB65 | 3.2 | 68.9 | +1.2 | 20 | 11.75 | 68.2 | ±0.15 | 1.8 |
| 18 | RB18 | 1.6 | 19.8 | | 8 | 0.804 | 19.6 | | 0.9 | 70 | RB70 | 3.2 | 74.0 | | 25 | 12.44 | 73.2 | | 1.8 |
| 20 | RB20 | 2.0 | 22.3 | +0.6 | 10 | 1.320 | 22.0 | ±0.10 | 1.1 | 75 | RB75 | 3.2 | 79.0 | +1.2 | 25 | 13.43 | 78.2 | ±0.15 | 1.8 |
| 22 | RB22 | 2.0 | 24.3 | | 10 | 1.470 | 24.0 | | 1.1 | 80 | RB80 | 3.2 | 84.0 | | 25 | 14.42 | 83.2 | | 1.8 |
| 24 | RB24 | 2.0 | 26.3 | 10 | 1.630 | 26.0 | 1.1 | 85 | RB85 | 3.2 | 89.0 | 25 | 15.41 | 88.2 | 1.8 | | | | |
| 25 | RB25 | 2.0 | 27.3 | +0.6 | 10 | 1.700 | 27.0 | ±0.10 | 1.1 | 90 | RB90 | 3.2 | 94.0 | +1.2 | 25 | 16.40 | 93.2 | ±0.15 | 1.8 |
| 26 | RB26 | 2.0 | 28.3 | | 10 | 1.790 | 28.0 | | 1.1 | 95 | RB95 | 3.2 | 99.0 | | 25 | 17.39 | 98.2 | | 1.8 |
| 28 | RB28 | 2.0 | 30.3 | +0.8 | 10 | 1.940 | 30.0 | ±0.10 | 1.1 | 100 | RB100 | 3.2 | 104.2 | +1.2 | 32 | 17.98 | 103.2 | ±0.15 | 1.8 |
| 30 | RB30 | 2.0 | 32.3 | | 10 | 2.100 | 32.0 | | 1.1 | 105 | RB105 | 3.2 | 109.2 | | 32 | 18.98 | 108.2 | | 1.8 |
| 32 | RB32 | 2.5 | 34.9 | 12 | 3.470 | 34.5 | 1.4 | 110 | RB110 | 3.2 | 114.2 | 32 | 19.97 | 113.2 | 1.8 | | | | |
| 35 | RB35 | 2.5 | 37.9 | +0.8 | 12 | 3.850 | 37.5 | ±0.10 | 1.4 | 115 | RB115 | 3.2 | 119.2 | +1.2 | 32 | 20.96 | 118.2 | ±0.15 | 1.8 |
| 38 | RB38 | 2.5 | 40.9 | | 12 | 4.200 | 40.5 | | 1.4 | 120 | RB120 | 3.2 | 124.2 | | 32 | 21.95 | 123.2 | | 1.8 |
| 40 | RB40 | 2.5 | 42.9 | +0.8 | 12 | 4.430 | 42.5 | ±0.10 | 1.4 | 125 | RB125 | 3.2 | 129.2 | +1.2 | 32 | 22.94 | 128.2 | ±0.15 | 1.8 |
| 42 | RB42 | 2.5 | 45.0 | | 16 | 4.540 | 44.5 | | 1.4 | | | | | | | | | | |


Part Number
Référence Teile Nummer Referencia de pieza

Tolerance
Tolérance Toleranz Tolerancia

Weight
Masse Gewicht Peso

Ring
Anneau/Circlips Ring Anillo

Groove
Gorge Nut Ranura

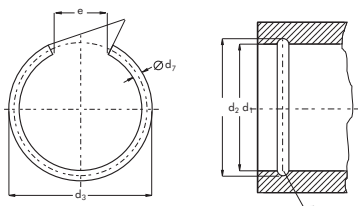

○ DIN 7993 B/RB

